



F SERIES

W8-2314

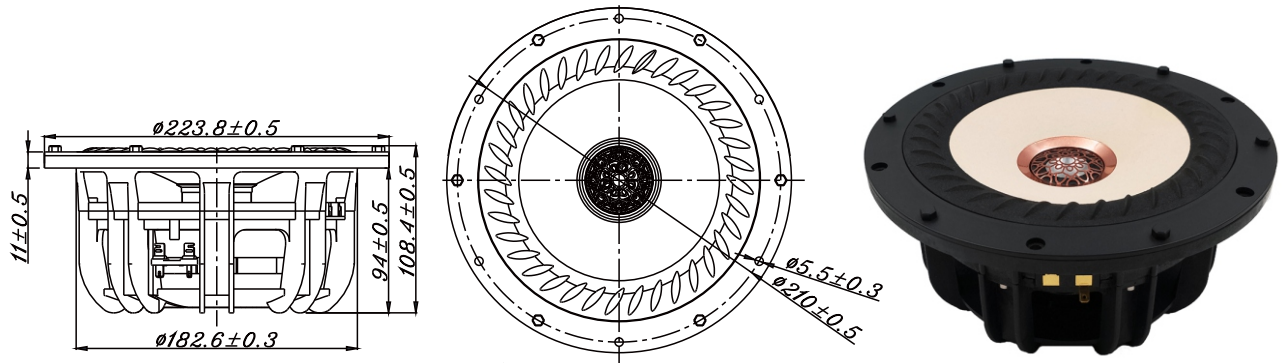

- 25mm TWEETER WITH 8" WOOFER COAXIAL SPEAKER DESIGN.
- UNDERHUNG MOTOR DESIGN WITH NEODYMIUM MAGNET TO REACH LOW THD (2nd, 3rd HARMONIC DISTORTION).
- PAPER CONE WITH DURABLE RUBBER SURROUND.
- ALUMINUM / MAGNESIUM ALLOY MEMBRANE TWEETER WITH BACK CHAMBERS DESIGN TO PERFORM 800 UP TO 40KHZ.

8" PAPER COAXIAL FULL RANGE

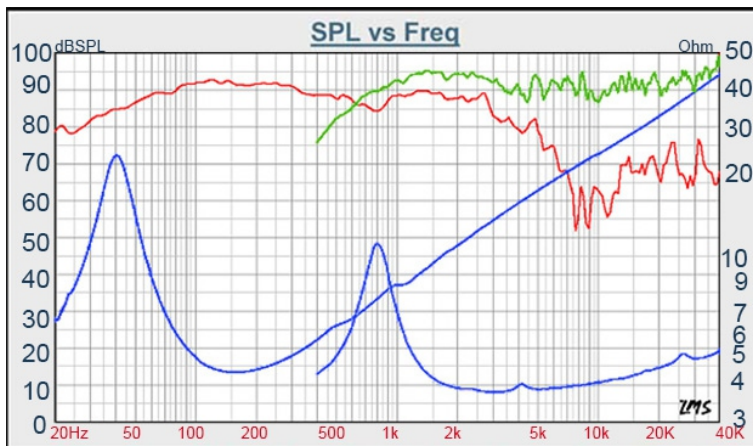

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1M	90 dB
FREQUENCY RESPONSE	38Hz-40 K Hz
FREE AIR RESONANCE	38 Hz
VOICE COIL DIAMETER	44.43 mm
AIR GAP HEIGHT	18 mm
RATED POWER INPUT	50 W
MAXIMUM POWER INPUT	100 W
FORCE FACTOR, BL	6.08 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	22.25 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	719.59 uMN ⁻¹
EFFECTIVE PISTON AREA	0.022 M ²
Levc	0.063 mH
Zo	22 Ω
Xmax	6 mm
Vas	49.46 Litr
Qts	0.46
Qms	2.93
Qes	0.54