



F SERIES

W35-1315SJ

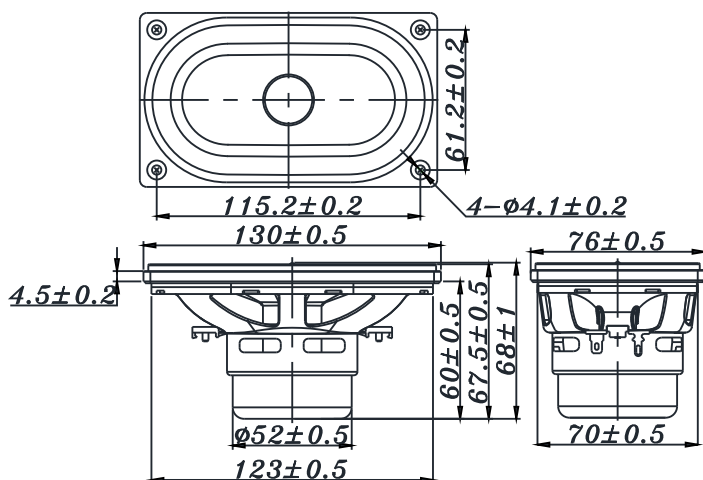

- FULL RANGE DESIGN
- GF REINFORCED NYLON, NEODYMIUM DESIGN
- ALUMINIUM PHASE PLUG COOLING
- PPM CONE WITH SANTOPRENE SURROUND
- GOOD FOR CAR, HOME THEATER, MULTIMEDIA APPLICATION
- MAGNETICALLY SHIELDED

3*5" PPM FULL RANGE

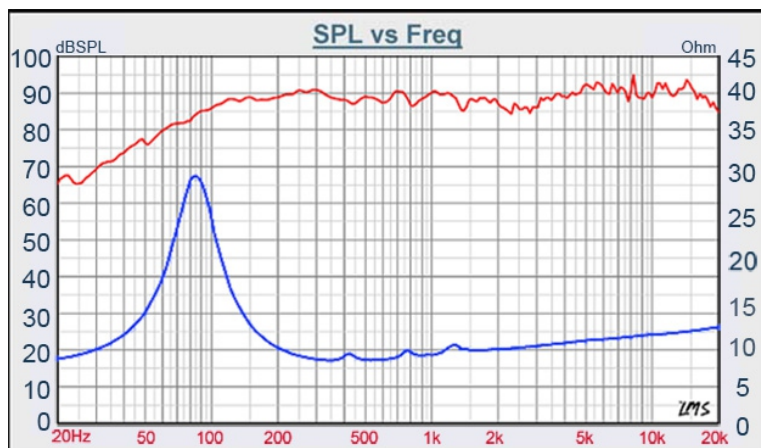

DIAPHRAGM MTL	Black color PPM
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	80-20 K Hz
FREE AIR RESONANCE	80 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	4.53 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	3.49 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	982 μMN ⁻¹
EFFECTIVE PISTON AREA	0.0047 M ²
Levc	0.0096 mH
Zo	30 Ω
X-max	3 mm
Vas	3.08 Litr
Qts	0.49
Qms	2.16
Qes	0.63

TB SPEAKERS

VOICE886.2.26570282 FAX886.2.26580166
E-MAIL:info@tb-speaker.com