



F SERIES

W3-1797S

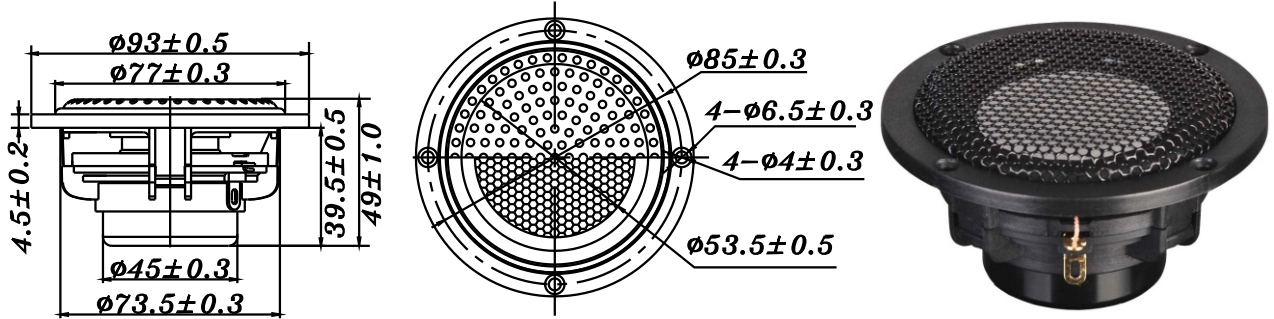

- FULL RANGE FREQUENCY DESIGN
- VERY WIDE DISPERSION PERFORMANCE
- FLAT ALUMINUM SANDWICH CONE
- NEODYMIUM MAGNET SYSTEM
- VERY LOW 2nd AND 3rd DISTORTION
- IT'S GOOD FOR FULL RANGE OR MID-RANGE APPLICATION

**3" SANDWICH
FULL RANGE / MIDRANGE**

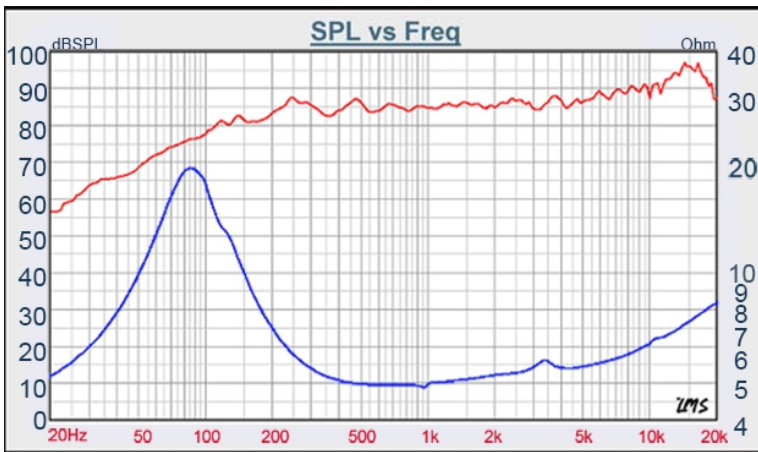

| | |
|-----------------------|----------------------------|
| DIAPHRAGM MTL | Sandwich |
| SURROUND MTL | Rubber |
| NOMINAL IMPEDANCE | 4 Ω |
| DCR IMPEDANCE | 3.6 Ω |
| SENSITIVITY 1W/1M | 85 dB |
| FREQUENCY RESPONSE | 90-20K Hz |
| FREE AIR RESONANCE | 90 Hz |
| VOICE COIL DIAMETER | 32 mm |
| AIR GAP HEIGHT | 8 mm |
| RATED POWER INPUT | 15 W |
| MAXIMUM POWER INPUT | 30 W |
| FORCE FACTOR, BL | 4.56 TM |
| TYPE OF MAGNET | Neodymium |
| MOVING MASS | 4.19 g |
| FERROFLUID ENHANCED | No |
| SUSPENSION COMPLIANCE | 664.51 μMN^{-1} |
| EFFECTIVE PISTON AREA | 0.0032 M^2 |
| Levc | 0.008 mH |
| Zo | 15 Ω |
| Xmax | 1 mm |
| Vas | 0.97 Liter |
| Qts | 0.35 |
| Qms | 1.74 |
| Qes | 0.44 |

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com