
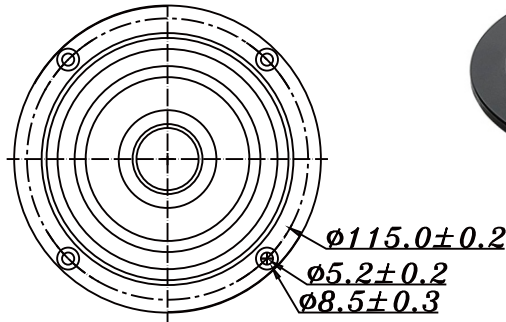



F SERIES

W4-2414

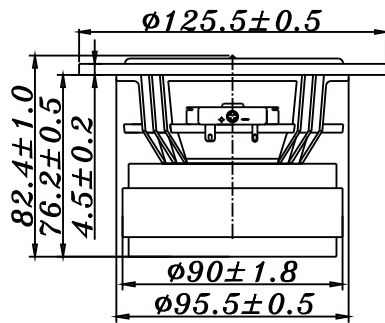

- FULL RANGE DESIGN, FREQUENCY RESPONSE 65HZ~40 KHz
- UNDERHUNG DESIGN
- EXTREMELY LOW THD DISTORTION ≤ 0.01
- ALUM. ALLOY BULLET DESIGN
- USE SPECIAL FORMULA PP CONE WITH ALUM. ALLOY EMBEDDED TECHNOLOGY. CREATE A BETTER HIGH FREQUENCY EXTENSION.
- GOOD CONSISTENCY

4" Alum.+PP FULL RANGE

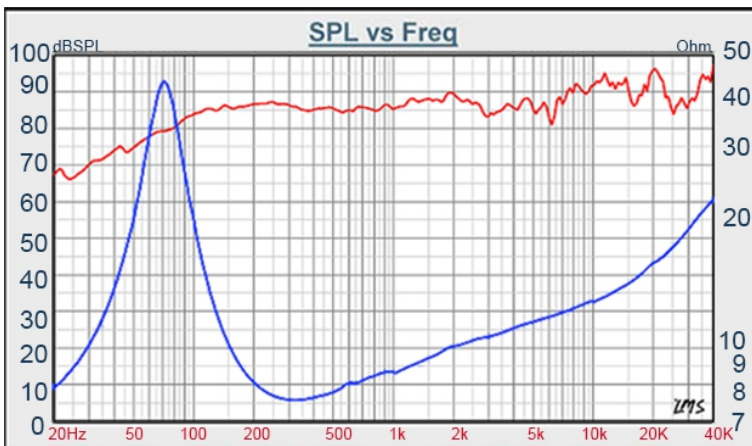

DIAPHRAGM MTL	Alum.+PP
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.3 Ω
SENSITIVITY 1W/1M	87 dB
FREQUENCY RESPONSE	65 - 40 K Hz
FREE AIR RESONANCE	65 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.49 TM
TYPE OF MAGNET	Ferrite
MOVING MASS	5.06 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1007 μMN^{-1}
EFFECTIVE PISTON AREA	0.0052 M^2
Levc	0.032 mH
Zo	45 Ω
X-max	2.5 mm
Vas	3.87 Litr.
Qts	0.40
Qms	2.77
Qes	0.47



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com